W2000P5

Powered by Weichai®

WEICHAI

POWERZOO

GENERATOR MODEL			W2000P5	
	Generator specificationsl		PRP	ESP
	Power	kW/kVA	1600/2000	1800/2250
	Rated speed	r.p.m.	1500	
	Available voltages	V	380~415	
	Frequency	Hz	50	
	Phase		3-PH	
	Power factor	Cos ϕ	0.8	
	Fuel cons 100%	L/H	438	
	Starting power	kW	10	
	Recommended battery	Ah	100	
	Number of batteries		8	
	Auxiliary voltage	VDC	24V	

Emergency Standby Power (ESP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utili ty source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.
Prime Power (PRP):
Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capabili ty is avai lable in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.
Continuous Power (COP):
Applicable for supplying power continuously to a constant electrical load for unlimi ted hours. Continuous Power (COP) in accordance wi th ISO 8528, ISO 3046, AS 2789, DIN6271 and BS 5514.
POWERZOO generators are CE certified and conform to the following Directives:
•EN 12100: 2010, EN ISO 8528-13: 2016, EN 60204-1: 2018,
•EN 61000-6-2: 2019, 2006/42/CE Machinery safety
•2014/35/EU Low voltage
•2014/30/EU Electromagnetic compatibility
•Power according to ISO 8528 and ISO 3046
•Ambient reference conditions 1000 mbar, 25° C, 30% relative humidity.
Information based on standard specification equipment unless otherwise stated.

FREQUENCY | DIESEL FUEL | WATER-COOLED | SOUNDPROOF | CERTIFICATION | ISO 9001 | STACKABLE

Dimension and Weight



Open Type

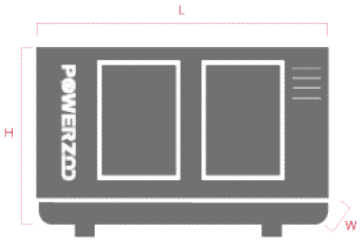

Silent Type

DIMENSION			OPEN TYPE	SILENT TYPE
	Length (L)	mm	5800	12192
	Width (W)	mm	2800	2438
	Height (H)	mm	3400	2591
	Dry weight	kg	NA	23850
	Fuel tank	L	NA	NA

POWERZOO has the right to modify any feature without prior notice. Weights and dimensions based on standard products. Illustrations may include optional equipment. Technical data described in this catalogue correspond to the available information at the moment of printing. The illustrations and images are indicative and may not coincide in their entirety with the product. Industrial design under patent.

POWERZOO

www.powerzoos.com

E-mail: info@powerzoos.com
Tel: +86 13358296663

W2000P5

Powered by Weichai®

WEICHAI

POWERZOO

Engine Specifications

ENGINE	Weichai®
Engine model	20M33D2020E310
Number of cylinders	20
Cylinder arrangement	V-Type
Cycle	Four stroke
Aspiration	Turbocharging and intercooling
Bore × Stroke	150×185 mm
Displacement	65.4 L
Compression ratio	15:1
Prime power/Speed	1850/1500 (kW/rpm)
Standby power/Speed	2020/1500 (kW/rpm)
Speed governor	ECU
Cooling system (open type)	40℃ tropical radiator
Cooling system (silent type)	50°C tropical radiator

ENGINE	Weichai®
Total lubrication system capacity	240 L
Coolant capacity (engine only)	114 L
Speed stability (%)	≤3%
Start type	Electrical
Maximum exhaust temperature	750℃
Exhaust gas flow	9844.7 kg/h
Maximum allowed back pressure	7.5 kPa
Intake air flow	9480.8 kg/h
Cooling air flow	TBD
Consumption @ 100% load ESP	481.8 L/H
Consumption @ 100% load PRP	438 L/H
Consumption @ 75% load PRP	328.5 L/H
Consumption @ 50% load PRP	219 L/H

Features:

- Diesel engine
- 4-stroke cycle
- Water-cooled
- Dry air filter
- Radiator with pusher fan
- Moving parts protection
- Radiator water level sensor (Optional)
- 55 degree radiator (Optional)
- Jacket coolant heater (Optional)
- Lube oil heater (Optional)
- Engine filter heater (Optional)
- Fuel inlet line heater (Optional)
- Heavy duty air filter (Optional)

Alternator Specification

ALTERNATOR	
Exciter type	Brushless, self-excited
Power factor	0.8
Voltage adjust range	≥5%

ALTERNATOR	
Voltage regulation NL-FL	≤±1.0%
Insulation grade	H
Protection grade	IP23

Options:

- AREP/PMG/EBS
- Air inlet filter (5% deration)
- louver (5% deration)
- Space heater
- Digital AVR
- Severe environmental impregnation
- Stator sensor
- PT100
- Rotor sensor
- Double bearing
- Drip proof cover
- Terminal box IP44
- Double bearing

E-mail: info@powerzoos.com
Tel: +86 13358296663

W2000P5

Powered by Weichai®

Controller Brands

SmartGen

ComAp

Deep Sea

DEIF

Woodward

Datakom

Controller Functions

OPTIONAL CONFIGURATION	Stand-alone Basic	Stand-alone Advanced	Synchronization Basic	Synchronization Advanced
Voltage between phases	●	●	●	●
Voltage between neutral and phase	●	●	●	●
Current intensities	●	●	●	●
Frequency	●	●	●	●
Apparent power (kVA)	●	●	●	●
Active power (kW)	●	●	●	●
Reactive power (kVAr)	●	●	●	●
Power factor	●	●	●	●
Coolant temperature	●	●	●	●
Oil pressure	●	●	●	●
Battery voltage	●	●	●	●
R.P.M.	●	●	●	●
Battery charge alternator voltage	●	●	●	●
High water temperature by sensor	●	●	●	●
Low oil pressure by sensor	●	●	●	●
Unexpected shutdown	●	●	●	●
Fuel storage by sensor	●	●	●	●
Stop failure/Start failure	●	●	●	●
Overspeed/Underspeed	●	●	●	●

● Standard ○ Optional

E-mail: info@powerzoos.com
Tel: +86 13358296663

W2000P5

Powered by Weichai®

WEICHAI POWERZOO

OPTIONAL CONFIGURATION	Stand-alone Basic	Stand-alone Advanced	Synchronization Basic	Synchronization Advanced
Emergency stop	●	●	●	●
High/Low frequency	●	●	●	●
High/Low voltage	●	●	●	●
Short-circuit	●	●	●	●
Incorrect phase sequence	●	●	●	●
Inverse power	●	●	●	●
Overload	●	●	●	●
Total hour counter	●	●	●	●
Kilowatt meter	●	●	●	●
Starts valid counters	●	●	●	●
Maintenance	●	●	●	●
USB	●	●	●	●
Software for PC	●	●	●	●
Alarm history	●	●	●	●
External start	●	●	●	●
Start inhibition	●	●	●	●
Mains failure start	●	●	●	●
Pre-heating engine control	●	●	●	●
Fuel transfer control	●	●	●	●
Engine temperature control	●	●	●	●
Programmable alarms	●	●	●	●
Genset start function in test mode	●	●	●	●
Programmable outputs	●	●	●	●
Multilingual	●	●	●	●
RS485		●	●	●
Modbus IP		●	●	●
J1939		●	●	●
Synchronization			●	●
Mains synchronization				●
Fuel level (%)	○	○	○	○
Low water level	○	○	○	○
GSM/GPRS modem	○	○	○	○
Remote screen	○	○	○	○

● Standard ○ Optional

E-mail: info@powerzoos.com
Tel: +86 13358296663